

H5E-DV PC 200

Height: 28.4" (72.1cm) Width: 7.5" (19.1cm) Depth: 17.4" (44.2cm)



- Dispenses hot water in three portion sizes
- Front of machine volume programming
- Precise temperature (60°F-210°F) (15.5°C-98.9°C) ensures consistent, high quality results; adjustable in 1° increments
- Three programmable volume settings and one push and hold continuous dispense button
- All stainless design
- Locate hot water at preparation site to increase speed, safety and efficiency of kitchen staff
- Dual voltage adaptable (Can operate at 120V/15 amp or 120/208-240V/20 amp)

Agency:



Specifications

Product #: 39100.0000

Water Access: Plumbed

Finish: Stainless

Faucet: Upper

Temp. Setting: 200°F (93.333°C)

Dispense: Portion Control

Dispense: Push Button

Additional Features

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz (236mL) cups/hr		Phase	# Wires plus Ground	Hertz
					35°F (1.67°C)*	140°F (60°C)*			
120/208-240	16.9	4050	No	-	59	192	1	3	60
120/208	15	3054	-	N/A	117	320	-	-	-
120/240	17	4050	-	N/A	155	427	-	-	-

*Temperature of water entering the sy

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-90	138-621	1/4" Male Flare Fitting	-

CAD Drawings



2D	Revit	KLC
●		

WARNING:



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
03/13/2025

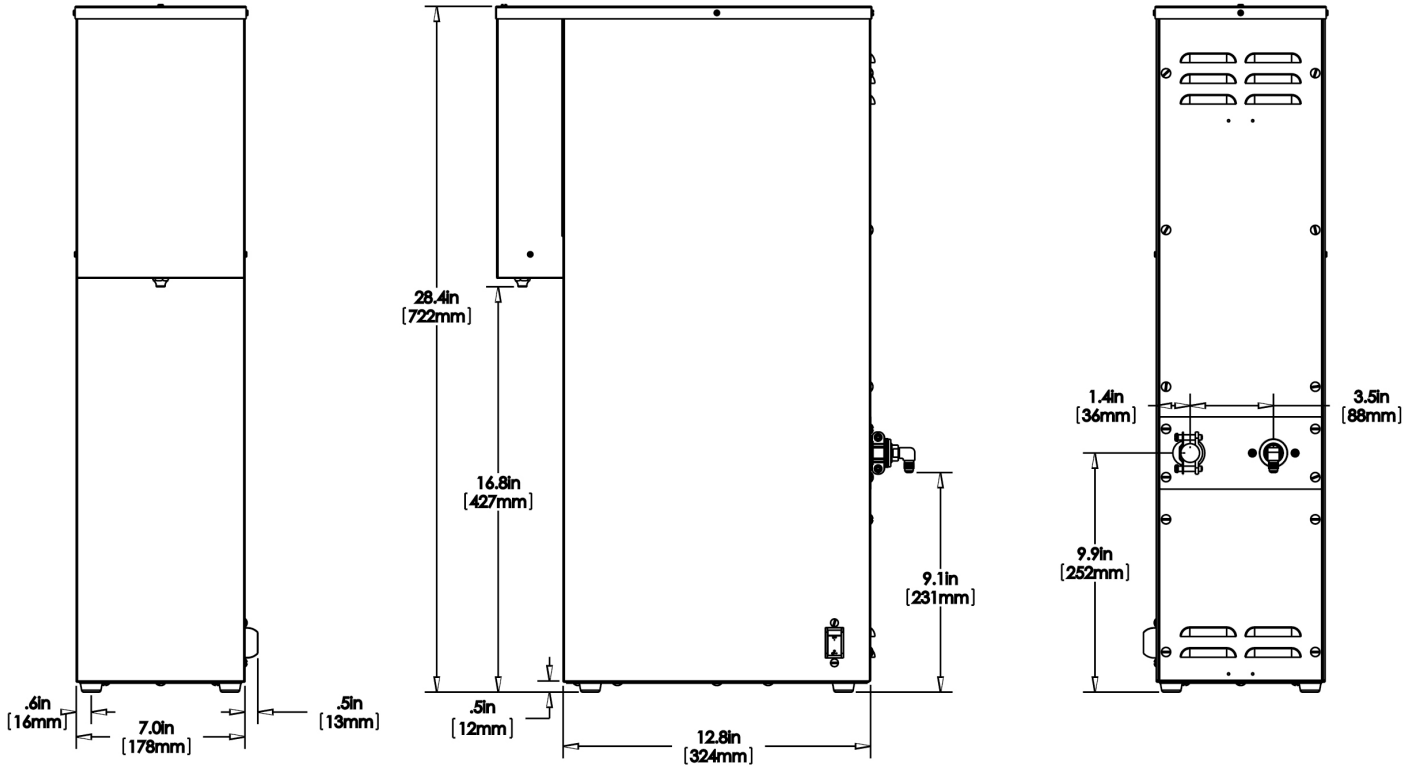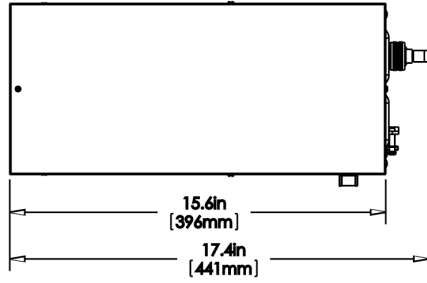

	Unit			Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	28.4 in.	7.5 in.	17.4 in.	32.3 in.	10.8 in.	20.4 in.	32.450 lbs	4.120 ft ³
Metric	72.1 cm	19.1 cm	44.2 cm	82.1 cm	27.5 cm	51.8 cm	14.719 kgs	0.117 m ³



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
03/13/2025

Related Products & Accessories:H5E-DV PC 200(39100.0000)




DRIP TRAY KIT (2.5"HT-HW2)

Product #: 02497.0000



DRIP TRAY

Product #: 02545.0000



COVER, DRIP TRAY-PERFORATED

Product #: 02546.0000

FOOT, RUBBER

Product #: 02547.0000



SYSTEM, WQ-55(2)5L

Product #: 56000.0001



SYSTEM, WQ-55(3).2L

Product #: 56000.0002



SYSTEM, WEQ-10(1.5)5L

Product #: 56000.0024



SYSTEM, WEQ-35(3).2L

Product #: 56000.0034



CARTRIDGE, WQ-55(2)5L

Product #: 56000.0101



CARTRIDGE, WQ-55(3).2L

Product #: 56000.0102



CARTRIDGE, WEQ-10(1.5)5L

Product #: 56000.0121



CARTRIDGE, WEQ-35(3).2L

Product #: 56000.0126

Serving & Holding Options: H5E-DV PC 200(39100.0000)

Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
03/13/2025