



# AMERICAN RANGE

A **HATCO** COMPANY

Project \_\_\_\_\_

Item # \_\_\_\_\_

Quantity \_\_\_\_\_

## 60" RESTAURANT RANGES

- |                                    |                                    |                                    |
|------------------------------------|------------------------------------|------------------------------------|
| <input type="checkbox"/> AR-10     | <input type="checkbox"/> AR-12G-8B | <input type="checkbox"/> AR-24G-6B |
| <input type="checkbox"/> AR-36G-4B | <input type="checkbox"/> AR-48G-2B | <input type="checkbox"/> AR-60G    |

### STANDARD FEATURES

- Commercial gas range 60" wide and 32 1/2" depth
- Cooking height 36"
- Stainless steel sides, front, and 6" deep front landing ledge
- Adjustable 6" legs
- Choose: 6" high stainless steel stub back, high riser, or high riser with shelf at no charge
- Two year limited warranty, parts, and labor
- Base options: Standard, convection, or storage base

### OPEN BURNERS

- 12" x 12" cast-iron top grates
- 32,000 BTU/hr. lift-off open burners
- Removable full width drip pan under burner

### STANDARD OVEN

- Steel oven burner rated at 35,000 BTU/hr.
- Oven dimensions: 26 1/2"W x 22 1/2"D x 13 1/2"H
- Thermostat ranging from 250°F to 500°F (121°C to 260°C)
- Oven Door: Spring assisted, counterweight door
- Two chrome plated oven racks (Additional racks optional)
- Two fixed rack positions
- Porcelain enamel oven interior for easy cleaning
- 100% safety gas shut off

### CONVECTION OVEN *(In place of standard oven)*

- Steel oven burner rated at 30,000 BTU/hr.
- Thermostat ranging from 250°F to 500°F (121°C to 260°C).
- Chrome rack guides with five tray positions
- Two chrome plated oven racks (Additional racks optional)

### GRIDDLES

- 1" thick steel griddle plate
- 3" wide grease collector
- One burner every 12", rated at 20,000 BTU/hr.
- Manual control valve for each burner
- Optional: Thermostatic griddle with modulating thermostat

### AVAILABLE OPTIONS

- Swivel Casters (Set of four – two with front brakes)
- Storage Cabinet Base (In place of standard oven)
- Thermostatic Control Griddle

GAS TYPE: ☐ NATURAL

☐ LP



### Model Shown AR-10

Shown with optional casters

### DESCRIPTION

American Range, restaurant range size 60" x 32-1/2" x 56" Stainless steel front, sides, backriser, shelf, and 6" adjustable legs. Removable full width drip pan. Choose 32,000 BTU/hr. open burners with lift-off burner heads or 20,000 BTU/hr. 12" section griddle or a combo burner griddle. Heavy-duty cast iron grates, 12" x 12". Burner knobs are cool to the touch, high temperature material. One oven: 35,000 BTU/hr. standard oven, or 30,000 BTU/hr. for convection porcelain interior and inside door panel, oven interior measures 26-1/2"W x 22-1/2"D x 13-1/2"H. Oven thermostat adjusts from 250°F to 500°F. All ovens supplied with two racks. Oven door with a spring assisted, counterweight mechanism requiring no adjustment. Rear gas connection and pressure regulator.



DESIGNED & BUILT IN USA  
PROFESSIONAL COOKING EQUIPMENT

A70171 RevE 01142025




## AMERICAN RANGE


A **HATCO** COMPANY

13592 Desmond St Pacoima CA 91331  
T. 818.897.0808 Toll Free: 888.753.9898  
www.AmericanRange.com


# 60" RESTAURANT RANGES with two 26 1/2" ovens

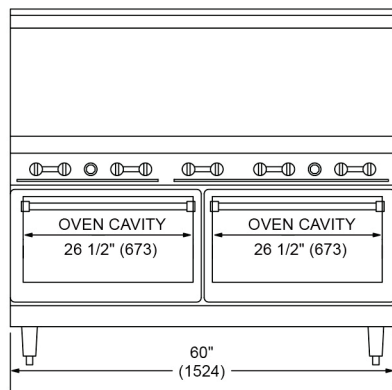

Front Oven Base

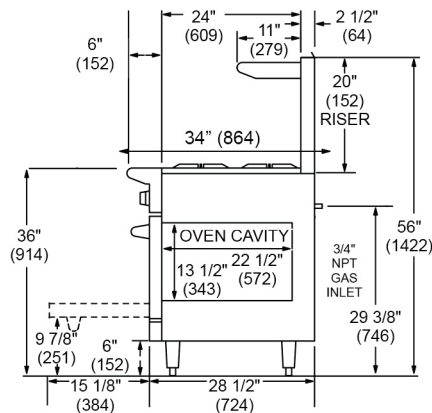

Side Standard Oven Base

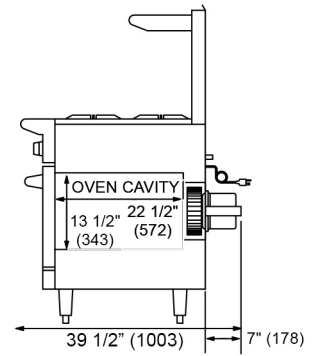

Side Convection Oven

| TOP |  | MODEL                               | BTU/hr. | (KW)  | BURNERS | GRIDDLE SIZE  | Shipping Weight* |       |
|-----|--|-------------------------------------|---------|-------|---------|---------------|------------------|-------|
|     |  |                                     |         |       |         |               | LBS              | (KG)  |
|     |  | AR-10                               | 390,000 | (114) | 10      | N/A           | 705              | (320) |
|     |  | AR-10-CC                            | 380,000 | (112) | 10      | N/A           | 851              | (356) |
|     |  | AR-10-DSB                           | 320,000 | (94)  | 10      | N/A           | 565              | (243) |
|     |  | AR-12G-8B                           | 346,000 | (101) | 8       | 12" (305 MM)  | 720              | (327) |
|     |  | AR-12G-8B-CC                        | 336,000 | (99)  | 8       | 12" (305 MM)  | 866              | (393) |
|     |  | AR-12G-8B-DSB                       | 276,000 | (81)  | 8       | 12" (305 MM)  | 580              | (263) |
|     |  | AR-24G-6B                           | 302,000 | (89)  | 6       | 24" (610 MM)  | 735              | (333) |
|     |  | AR-24G-6B-CC                        | 292,000 | (86)  | 6       | 24" (610 MM)  | 881              | (400) |
|     |  | AR-24G-6B-DSB                       | 232,000 | (68)  | 6       | 24" (610 MM)  | 595              | (270) |
|     |  | AR-36G-4B                           | 258,000 | (76)  | 4       | 36" (914 MM)  | 750              | (340) |
|     |  | AR-36G-4B-CC                        | 248,000 | (73)  | 4       | 36" (914 MM)  | 896              | (406) |
|     |  | AR-36G-4B-DSB                       | 188,000 | (55)  | 4       | 36" (914 MM)  | 610              | (277) |
|     |  | AR-48G-2B                           | 214,000 | (63)  | 2       | 48" (1219 MM) | 765              | (347) |
|     |  | AR-48G-2B-CC                        | 204,000 | (60)  | 2       | 48" (1219 MM) | 911              | (413) |
|     |  | AR-48G-2B-DSB                       | 144,000 | (43)  | 2       | 48" (1219 MM) | 625              | (283) |
|     |  | <b>With (2) Standard Ovens Only</b> |         |       |         |               |                  |       |
|     |  | AR-60G                              | 170,000 | (50)  | N/A     | 60" (1524 MM) | 780              | (354) |

"C" = Convection Oven "SB" = Storage Base, "G" = Manual Griddle Top.  
Griddle on the left, storage base on the right.

Combo base options available – choose standard, convection ovens, or storage base.  
Contact factory for other options.

COMBUSTIBLE WALL CLEARANCES: For use only on noncombustible floors. Legs or casters are required, or 2" (51) overhang is required when curb mounted. Clearance from non-combustible walls is 0". When unit is placed next to combustible walls, clearances must exceed 12" (305) from sides, and 4" (102) from rear. Commercial cooking equipment requires an adequate ventilation system. For additional information, refer to the National Fire Protection Association's standard, NFPA96 "Vapor Removal from Cooking Equipment." (NOTE: For North America only)

| CONVECTION OVEN ELECTRICAL |       |      |
|----------------------------|-------|------|
| VOLTAGE                    | PHASE | AMPS |
| 120                        | 1     | 4    |

| MANIFOLD PRESSURE |             |               |
|-------------------|-------------|---------------|
| NATURAL GAS       | PROPANE GAS | MANIFOLD SIZE |
| 5.0" W.C.         | 10.0" W.C.  | 3/4" (19MM)   |

Specify type of gas and altitude if over 2000 feet.  
Please specify gas type when ordering.

15 amps three prong cord provided

\*Shipping weight includes packaging and is approximate.

DESIGNED & BUILT IN USA  
PROFESSIONAL COOKING EQUIPMENT  
A70171 RevE 01142025



**AMERICAN RANGE**  
A Harsco COMPANY

13592 Desmond St Pacoima CA 91331  
T. 818.897.0808 Toll Free: 888.753.9898  
www.AmericanRange.com