



CHEMICAL SANITIZING ENERGY SAVING SINGLE RACK DISHWASHER

E-EXT

Low Temperature
Energy Saving Dishwasher



MODEL: E-AH-EXT

MODEL: E-C-EXT



FEATURES

- 40 racks / 160 covers per hour.
- 20-1/2" Door opening for maximum clearance.
- Economical to operate. Uses only 1.01 gallons of water per cycle.
- All stainless steel construction assures long life and years of trouble free operation.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps.
- Top mounted controls include built-in chemical pumps and deliming system for dealing with scale.
- Auto start/stop makes operation safe and easy.
- New integrated scrap tray prevents food soil from entering drain system.
- Airgap fill system.

CONVERTIBLE CORNER TO
STRAIGHT AND STRAIGHT TO
CORNER.

AVAILABLE OPTIONS

- Alternative cycle times
- Solid/Powder Dual Bowl Dispenser
- 3 Door Version
- Stainless Steel Tables
- Alternative Electrical Available
- Slant Shelf 21" x 42"
- Stainless Steel Scrap Trap in lieu of Poly Pro

CMA MODEL: E-EXT



Low Chemical Alarm



Temp-Sure
Requires a separate 208-240v
3 phase 40 amp power supply

Note: Some US States may require Energy Star ratings for Commercial Dishwashers. The specifier or installer is responsible for knowing their local codes, standards, and regulatory requirements. This product was certified and met the requirements of previous Energy Star Version 2.0 for commercial dishwashers as required by some states.






MODEL E-EXT

LOW WATER
MACHINES

WARNINGS:

- Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Electrical, Plumbing and Safety codes.
- CMA recommends utilizing a water softening system to maintain water hardness measurements of 3.5 gpg (grains per gallon) or less. This will assure maximum results and optimum operation of the dishmachine.

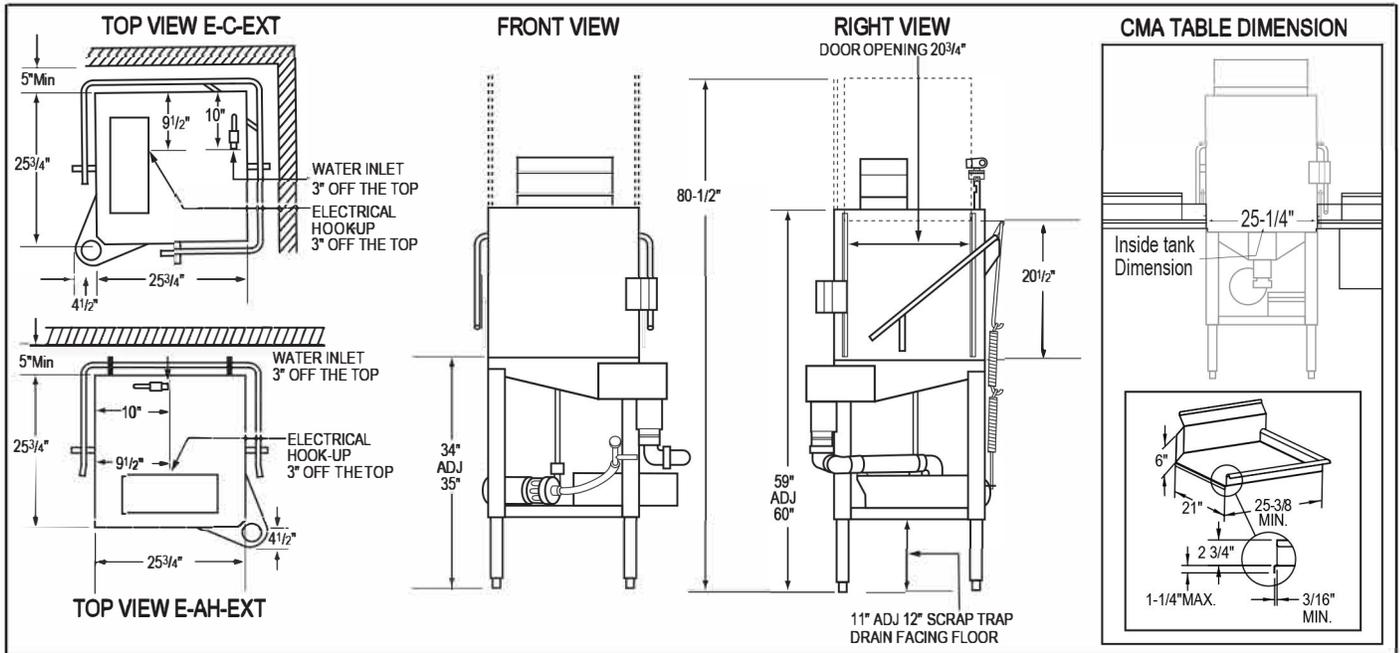

Specifications:

| MODEL E-EXT | USA | METRIC | MODEL E-EXT | USA | METRIC |
|----------------------------|-----------|-------------|------------------------------|--------------------------------|----------------------|
| OPERATING CAPACITY | | | WASH PUMP MOTORS HP | 1 | 1 |
| RACKS PER HOUR (NSF RATED) | 40 | 40 | DIMENSIONS | | |
| OPERATING CYCLE | | | DEPTH | 25-3/4" | (65.4cm) |
| WASH TIME-SEC RINSE | 45 | 45 | WIDTH (OUTSIDE DIMENSION) | 25-3/4" | (65.4cm) |
| TIME-SEC DWELL | 30 | 30 | TOTAL HEIGHT WITH DOORS OPEN | 80-1/2" | (204cm) |
| TIME-SEC TOTAL | 15 | 15 | STANDARD TABLE HEIGHT | 34" | (86cm) |
| CYCLE TIME | 90 | 90 | MAXIMUM CLEARANCE FOR DISHES | 20-1/2" | (52cm) |
| PUMP CAPACITY | 52 GPM | (197 LPM) | | | |
| OPERATING TEMPERATURE | | | STANDARD DISHRACK DIMENSIONS | 1 20" x 20" | 1 (50.8 x 50.8cm) |
| REQUIRED | 120°F | (49°C) | ELECTRICAL RATING | VOLTS 115 | AMPS 16 |
| RECOMMENDED | 140°F | (60°C) | | | |
| WATER CONSUMPTION | | | APPROXIMATE SHIPPING WEIGHT | E-AH EXT/E-C EXT 262# | (118.8kg) |
| PER RACK | 1.01 GAL. | (3.8 L) | | E-3D EXT 264# | (119.8kg) |
| PER HOUR | 40.4 GPH | (152.9 LPH) | SHIPPING DIMENSIONS | PALLET & BOX @ 41" X 41" X 80" | |
| WATER REQUIREMENTS | | | | | |
| WATER INLET | 1/2" | (1.27cm) | | | |
| DRAIN-I.P.S. | 2" | (5.1cm) | | | |

Summary Specifications: Model E-EXT

CMA Energy Miser model E-EXT low temperature, chemical sanitizing commercial dishwashers meet ETL, UL, and CUL sanitation and construction standards WITHOUT the use of BOOSTER or TANK HEATERS. The model E-EXT is constructed entirely of stainless steel. Each unit automatically washes, rinses and sanitizes utensils in standard 19-3/4"-19-3/4" racks. Units come with standard upper and lower stainless steel wash arms. **Note: This machine does not have built-in heaters, therefore produces no steam.**

- Available Models:**
- E-AH Straight EXT
 - E-C Corner EXT
 - E-3-Door EXT

Advisory: CMA does NOT endorse "Tankless On-Demand" water heaters for use on CMA Dishmachine products. CMA DOES endorse, and highly recommends, the standard "tank" style water heaters, sized properly to handle each particular facility with their water heating requirements.



CMA Dishmachines • 17707 Valley View Ave; Cerritos, CA 90703 • 800-854-6417 • 714-898-8781 • Fax: 714-895-2141 • www.cmdishmachines.com © 09-2024 CMA, Inc.

CMA reserves the right to modify specifications or discontinue models without prior notification.

