T&S BRASS — MAKING IT EASY TO CONVERT TO TOUCH FREE

Protect the health of your customers and employees.



Retrofit with:

EC-3105




EC-3105-HG



Easy to Retrofit Using the Existing Sink • No Electricity Required
All Units Come Standard with A Battery Power Option


INSTALLATION STEPS

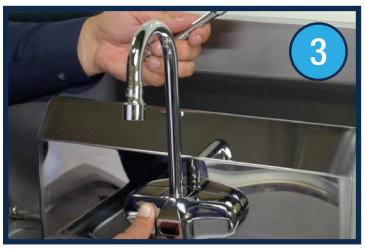







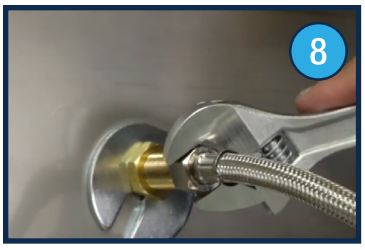





1. Make sure the water is turned off.
2. Remove the existing Manual Faucet.
3. Place the new Sensor Faucet on the backsplash.
4. Tighten hardware.
5. Attach flex water lines to shut-off valves.
6. Fasten control module to the wall.
7. Secure flex water lines to the mixing valve.
8. Attach flex line to the faucet inlet and the control module outlet.
9. Remove the protective rubber cap.
10. Attach the sensor cable.
11. Attach the cable connector cover.
12. Turn the water on.

Visit *tsbrass.com/c/sensor-faucets* today!

2 Saddleback Cove • P.O. Box 1088 • Travelers Rest, SC 29690 • *Toll-Free* 800-476-4103 • *Phone* 800-476-4103 • *Fax* 800-868-0084