



HEAVY DUTY RANGES
GRIDDLE TOP

IMPERIAL®

Model Numbers

IHR-G36	IHR-GT36
IHR-G36-C	IHR-GT36-C
IHR-G36-XB	IHR-GT36-XB
IHR-G36-M	IHR-GT36-M



1" (25 mm) thick steel polished griddle plate.



"M" shaped burner for even heating throughout the oven cavity.



Accommodate sheet pans front-to-back and side-to-side.



IHR-G36 shown with optional stainless steel backguard and shelf

GRIDDLE TOPS - Highly polished griddle plate provide even heat across entire surface.

- "U" shaped burners have burners have 30,000 (9 KW) BTU output, located every 12" (305 mm) with one control per burner.
- Aeration baffles between burners for quick recovery.
- Manual or thermostatic (GT36) controls are available.
- 4" (102 mm) wide grease gutter and large grease can with 1 gallon (3.8 L) capacity.

STANDARD OVEN - 40,000 BTU/hr (12 KW) oven with 100% safety pilot and manual shut-off valve.

- Unique burner baffle distributes heat flow to provide even temperatures throughout the oven cavity.
- Exclusive heat deflector reflects heat into the oven, not the floor.
- Chef Depth interior is 26-1/2" w x 26" d x 14" h (673 x 660 x 356 mm) and accommodates 18" x 26" (457 x 660) sheet pans left-to-right and front-to-back.
- Porcelanized sides, rear, deck and inner door liner for easy cleaning.
- Superior heavy-duty door hinge.
- Side oven controls are protected in the cool zone.
- One chrome oven rack is included.

CONVECTION OVEN - 35,000 BTU/hr. (10 KW) convection oven with 1/4 hp blower motor cooks products quickly and evenly with less shrinkage.


- Electronic ignition system with a single solenoid valve.
- Convection oven interior dimensions 26-1/2" w x 22-1/2" d x 14" h (673 x 572 x 356 mm).
- Three position switch for cooking or cool down. Fan shuts off automatically when door is open.
- 1/4 hp blower motor.
- Porcelanized side, rear, deck and door lining for easy cleaning. Stainless steel door gasket.
- Burner "ON" indicator light and one hour manual timer.
- Three chrome oven racks included.





HEAVY DUTY RANGES
GRIDDLE TOP

IMPERIAL®

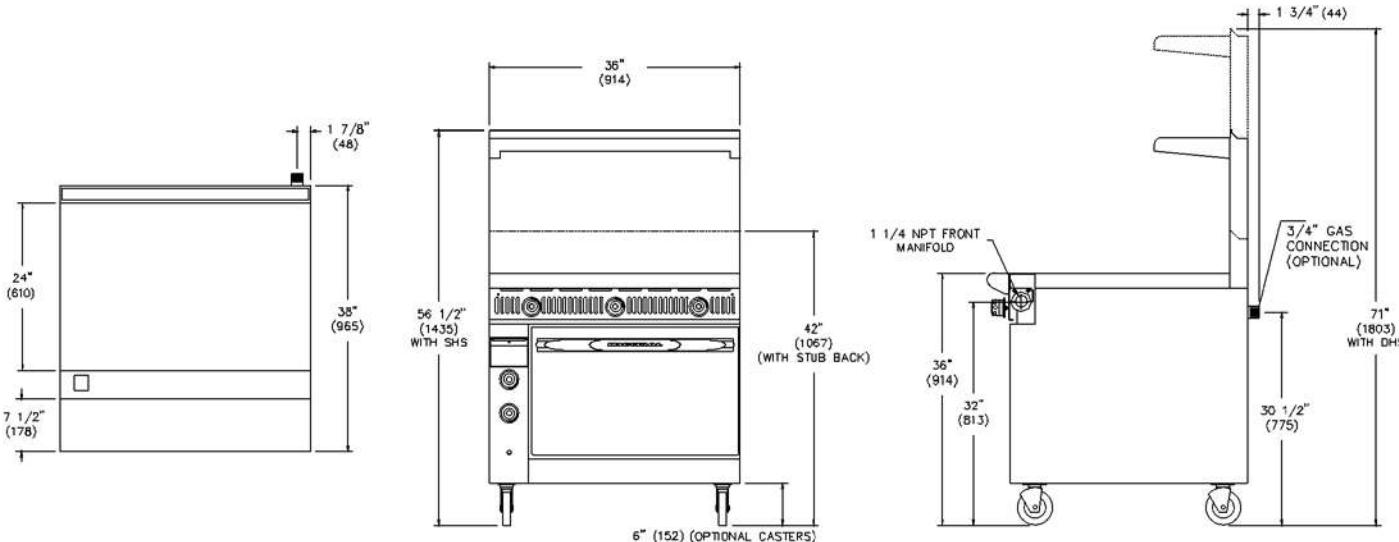

GRIDDLE TOP HEAVY DUTY RANGES

TOP	MODEL	GAS OUTPUT BTU (kW)	GRIDDLE TOP DIMENSIONS	SHIP WEIGHT (KG)	LBS	MANIFOLD PRESSURE NATURAL GAS 5.0" W.C.	MANIFOLD SIZE 1-1/4"
GRIDDLE TOP WITH MANUAL CONTROLS							
	IHR-G36	130,000 (38)	36" w x 24" d (914 w x 610 d mm) (267)	610		10.0" W.C.	
	IHR-G36-C	125,000 (37)	36" w x 24" d (914 w x 610 d mm) (303)	670		Specify elevation, if over 2,000 ft.	
	IHR-G36-XB	90,000 (26)	36" w x 24" d (914 w x 610 d mm) (200)	440			
	IHR-G36-M	90,000 (26)	36" w x 24" d (914 w x 610 d mm) (152)	335			
GRIDDLE TOP WITH THERMOSTATIC CONTROLS							
	IHR-GT36	130,000 (38)	36" w x 24" d (914 w x 610 d mm) (276)	610			
	IHR-GT36-C	125,000 (37)	36" w x 24" d (914 w x 610 d mm) (303)	670			
	IHR-GT36-XB	90,000 (26)	36" w x 24" d (914 w x 610 d mm) (200)	440			
	IHR-GT36-M	90,000 (26)	36" w x 24" d (914 w x 610 d mm) (152)	335			

Measurements in () are metric equivalents.

NOTES

- "C" specifies (1) 26-1/2" (673 mm) Convection Oven - "XB" specifies (1) Cabinet Base
- "M" specifies Modular, Counter Top Model - "G" specifies Griddle Top with Manual Controls
- "GT" specifies Griddle Top with Thermostatic Controls

EXTERIOR

- Sleek European styling with wide radius ledge and optional high shelf
- Stainless steel front, sides, backguard, shelf, landing ledge and kick plate
- Welded and polished stainless steel seams
- Enclosed front 1-1/4" (32 mm) manifold
- Common ledges, backguards and shelves are available as options for a seamless, professional look
- Large 7" (178 mm) stainless steel landing ledge
- Unique cast aluminum control knobs feature a heat protection grip
- 6" (152 mm) high 2-1/2" (64 mm) diameter heavy duty legs with adjustable feet
- One year parts and labor warranty

DIMENSIONS

36" w x 38" d x 36" h*
(914 x 965 x 914 mm)

CRATED DIMENSIONS

39-1/2" w x 41" d x 35" h
(1003 x 1041 x 889 mm)

* to cooktop

OPTIONS AND ACCESSORIES

- Heavy duty stainless steel backguards
- Salamander or Cheesemelter Infra-red Broilers
- Reinforcement channels for mounting cheesemelter/salamander
- Stainless steel common front landing ledge 54", 72", 90", 108" (1372, 1829, 2286, 2743 mm)
- Chrome and Grooved griddle tops
- Stainless steel interior on open cabinet base
- Stainless steel double doors on open cabinet base
- Stainless steel center shelf in open cabinet base
- Extra chrome racks
- 3/4" rear gas connection for single unit connection
- 1-1/4" rear gas connection batteries up to 600,000 BTU (176 KW)
- Gas shut off valve, 3/4" or 1-1/4", N.P.T.
- Gas pressure regulator, 3/4" or 1-1/4", N.P.T.
- Quick disconnect and flexible gas hose, 3/4" or 1-1/4", N.P.T.
- 6" (152 mm) casters

IMPERIAL®

H-3 2/13/14

© 2014 Imperial Commercial Cooking Equipment

1128 Sherborn Street Corona, CA 92879
800.343.7790 Ph: 951.281.1830 Fax: 951.281.1879
www.imperialrange.com
E-mail: imperialsales@imperialrange.com

Printed in the U.S.A.



Imperial reserves the right to change specifications at any time without prior notice and without any obligation for past or future equipment purchases. Visit www.imperialrange.com for specification updates.